
dustie®



Dustie Air Cleaner

瑞典達氏空氣清淨機 DAC500 Plus

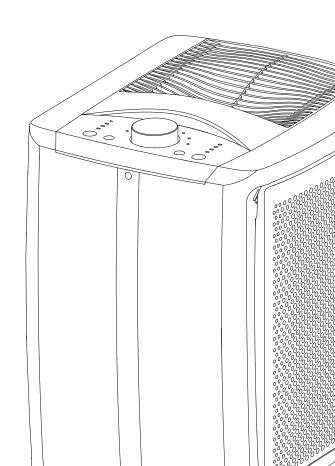

Please read this operating manual, Before start to use it. (請在使用本產品前,閱讀本操作手冊) 2.1rd Oct Veriosn, 2023

Safety Instructions

- Please read the operating manual carefully before use and keep it properly for future reference.
- When using electrical appliances, we should have basic safety knowledge to avoid fires, electric shocks and other injuries. You are expected to follow the instructions below.

0	Use the product safely to avoid fires, electric shocks and other injuries.	0	The product must be erect in operation.
0	Do not lay the wire under a carpet or close to a heat source.	0	Keep foreign objects from entering or blocking the air inlet or outlet, otherwise the product will be damaged.
0	When the filter replacement (cleaning) indicator light is on, replace (or clean) the filter to ensure high cleaning performance.	0	Do not sit, stand or put items on the product.
\bigcirc	Do not use the product when it or its wire or plug is damaged.		Do not use the product in a place with any inflammable gas or steam.
\bigcirc	Do not use the product when it does not have a complete filter.	\bigcirc	Do not use the product outdoors or with the door and windows open.
	Do not use the product close to a moist or easily wetted place, such as a bathroom, a kitchen, a water tank or a highly moist basement.		If the wire is damaged, have it repaired and replaced by the manufacturer or an authorized service center and maintenance personnel to avoid dangers.



- Electrical appliances are not intended to be used by users who are lack of physiology, perception, mental ability, experience or knowledge(including children), unless they are safely under the supervision or guidance of persons responsible for their safety.
- Children should be monitored, to ensure that children do not play appliances.


[Preparation prior to use]

- Take out the product from its packing box and place it on a table or flat floor. The body of the
 product should be at least 60cm or more away from the walls or other home furnishing to
 promote air circulation.
- Please operate according to the instructions on the yellow sticker. Push open the filter screen
 covers on both sides in the upper part of the product. First remove the Pre Filter; turn the two
 fixed knobs above the filter screen; take out the Molecular Filter and HEPA (please remove all
 the plastic bags of the filters and have them recycled according to the regulations made by the
 local government to avoid the wrong use by children); restore the filters to the original positions
 in order; restore the cover.
- Caution: Please remove all packing materials before use so as not to block the air inlet and outlet.

1



- Air cleaner body
- High efficiency particulate air filter
- Molecular filter
- 4 Pre filter
- 5 Filter cover
- 6 One power cord





Products	Dustie Air Cleaner	System Structure	Parallel double inlet mechanical dust collection
Model	DAC500 Plus	CADR	535 m³/h
Power Consumption	40W	Noise Performance	33-60dB
Rated Voltage	110V~60Hz	Cover Area (MAX)	64m² (19 Square meter)
Energy Efficiency	0.220cmm/W	CASR	8.85cmm
Air Quality Sensors	Gaseous / Particulate	Intelligent Mode	Yes
Dimensions	Product: 340 (W) x388 (D) x496 (H) mm	Weight	Net:8.2kg
	Gift Box: 377 (W) x420 (D) x545 (H) mm		Gross:11kg

Operation instructions

Plug in the product

When plugged in, the air cleaner will give out the "B" sound; the green, orange and red air quality indicator lights are lit and extinguished one by one in order; the gear indicator lights, from AUTO to MAX, are lit and extinguished one by one in order; the air cleaner is in the standby state.

Power-on

Press ((b)). The power indicator light (blue) will be on; the product will get started and set in Gear 2 (\approx) and the wind speed indicator light (blue) will be lit.

Power-off

In the operation of the air cleaner, press the (()) button to turn it off. The air cleaner will give out a long "B" sound before entering the standby mode.

Air quality indicators

When the product powers on, the dual air quality sensor will work for 3 minutes; then the air quality detector will continuously collect the ambient air quality information automatically, and control the indoor air quality at any moment. (Green air quality indicator: high air quality; yellow air quality indicator: normal air quality; red air quality indicator: poor air quality)

Wind speed selection

To change the mode or gear, rotate the wind speed knob to select it. The blue indicator light will be lit together with the selected gear to indicate the selected current gear and the wind speed will gently change to the selected gear.

Timer setup

Running time of the product can be set as 2 hours, 4 hours, 8 hours and 12 hours.

Press (\bigcirc). The air cleaner gives out the "B" sound; the (2H) indicator light is lit; the air cleaner is set to power off after running for 2 hours. To select 4 hours, 8 hours or 12 hours, press (\bigcirc) again. If the timer indicator lights are not all lit, the timer is canceled.

Intelligent mode

In operation, the product can switch among the following three intelligent modes freely.

Auto mode

(A)

The dual air quality sensor in the product can switch to a proper wind speed automatically in accordance with the result of sensing.

Cleaning mode

<u>2.5</u> 0.1 Press this button. The product switches to the fast cleaning mode, operating at the top speed, high speed and medium speed alternately with an interval of one minute. 30 minutes later it will switch to the Auto mode and the automatic gear indicator light will be lit at the same time.

Sleep mode zz2

In the Sleep mode, the air cleaner operates in the Mute gear; the indicator light becomes dimmer and the air quality indicator light goes out.


Anion


In the operation of the product, press (\otimes) to turn on or off the anion.

Remote control

With the remote control, you can operate the air cleaner freely.

For the sake of clean and comfortable air, it is suggested to make the product operate at the Medium or High gear for one hour before deciding to switch to the Mute gear or not.



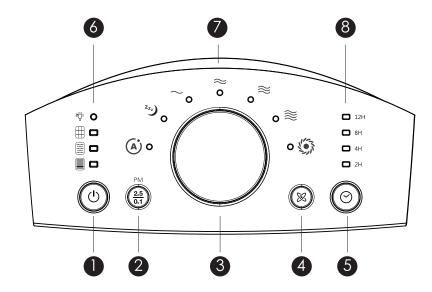

- Power button (indicator light) (
- Past cleaning button (indicator light) 2.5
- Mode / wind speed gear knob
- Anion button (indicator light) 🔀

- **5** Timer button ⊗
- Filter replacement indicator light (reset button)
 (Pre Filter / Molecular Filter / HEPA)
 Light control (reset button)
- Air quality indicator
- 8 Timer indicator light

Filter monitoring:

Pre Filter indicator light/ reset button ⊞

When the air cleaner is used for 1 months, the Pre Filter cleaning indicator light will keep blinking to remind you to clean the Pre Filter. Pre Filter is washable. It can be cleaned with the vacuum cleaner or washed with water (please put the Pre Filter into the body of the product after it is washed and dried). When the cleaning is completed, press the Pre Filter indicator light for about 5 seconds with a sharp object. The indicator light no longer blinks and then it is extinguished. The timer is reset.

Molecular Filter indicator light/ reset button

When the air cleaner is used for 3 months, the Molecular Filter replacement indicator light (red) will keep blinking to remind you to replace the Molecular Filter. After the Molecular Filter is replaced, press the replacement indicator light for about 5 seconds. The indicator light no longer blinks and then it is extinguished. The timer is reset. Timer has been reset. There will be a prompt upon the next setting time. Tips: It's suggested the Molecular Filter should be replaced every 3 to 6 months according to the different use circumstances. (If the air cleaner is often used, it's suggested the Molecular Filter should be cleaned once a month in order to achieve the desired filtration effect.)

4

Control panel / cleaning maintenance

High efficiency filter (HEPA) indicator light / reset button

When the air cleaner is used for 6 months, the HEPA replacement indicator light (red) will keep blinking to remind you to replace the HEPA. After the HEPA is replaced, press and hold the indicator light for about 5 seconds. The indicator light no longer blinks and then it is extinguished. The timer is reset. Timer has been reset. There will be a prompt upon the next setting time. Tips: It's suggested the HEPA should be replaced every 6 to 12 months according to the different use circumstances. (If the air cleaner is often used, it's suggested the HEPA should be cleaned once a month in order to achieve the desired filtration effect.)

Light control:

In the power on mode, press $(\mathring{\mathbb{Q}})$ reset button to set the air quality and the brightness of the blue indicator light. Please note that the setting will be stored in the permanent memory. To be specific, once the air cleaner is re-switched on after powering off, the brightness of the indicator light remains the same as the last one.


Notes: There are four degrees of brightness: normal brightness - medium brightness (initial value) - half brightness - (air quality indicator light) being extinguished + (blue indicator light) maintaining half brightness.

[Product cleaning and maintenance]




The electrical equipment should be turned off power before the relevant operations such as cleaning or maintenance of the electric appliance.

Caution



Remove the filter covers, clean them gently with the little-brush sucker of a vacuum cleaner or wet cloth and assemble them again when they are completely dry.




Wipe outer surfaces of covers of the main body gently with wet cloth. Keep water from entering the air inlet and outlet to avoid impact on the motor or the switch position.




Do not immerse the product into water or wipe it with chemical cleansers. Keep water from entering the product.

Cleaning and replacing the filter



Stop and unplug the product.



Open the filter covers on both sides: pull out the filter covers on both sides in the upper part of the product.



3 Remove the Pre Filter and the Molecular Filter (as well as the plastic bags in case the air cleaner is a new one)




Turn the fixed knobs




Slide the HEPA along the slot and remove it by lifting it outwards



6 Clean or replace the filter with a vacuum cleaner (Pre Filter can be washed with water and dried before



Restore the filters in order and restore the cover.



Keep and hold it for about 5 seconds

Plug in the product and press ((1)) button to turn on the air cleaner. Press and hold the cleaning or replacement indicator light for about 5 seconds. The indicator light no longer blinks and then it is extinguished. The timer is reset. Timer has been reset. There will be a prompt upon the next setting time.



In order to better use the air cleaner, please do not block the holes of the odor sensor and the dust sensor on the rear decoration strip on the body of the air cleaner. Often clean the air cleaner to keep it clean.

Common problems

Common problem	Troubleshooting
Why is there no air coming out of the air cleaner?	 Inspect whether the wire plug has been properly inserted or not. Inspect whether plastic bags of the filter have been removed or not. Inspect whether the filter has been properly assembled or not. Inspect whether the filter covers have been properly assembled or not. Check whether the outlet in the upper part of the air cleaner is blocked. If it is blocked, it will affect the operation of the air cleaner. Inspect whether operation is set as the fixed-time mode and the set time is up.
Why does the filter need to be cleaned?	 The filter is the core of the product, so regular cleaning can not only improve its filtering performance but also prolong its life. The DAC500 series air cleaners can be externally cleaned after it is used for a period of time. After cleaning the filter according to the instructions, put it back into the air cleaner. Plug in the air cleaner. After the cleaning of the Pre Filter, press and hold the indicator light for 5 seconds to reset the timer.
How often should the HEPA be replaced?	• It depends on the service conditions. If the product is used in a place with poor air quality or in a newly decorated house, it is suggested to clean or replace the filter more frequently. After cleaning the filter according to the instructions, put it back into the air cleaner. Plug in the air cleaner. Press and hold the corresponding filter (reset botton) for 5 seconds to reset the timer.
How often should the Molecular Filter be replaced?	The Molecular Filter should be replaced according to the use environment. If the Molecular Filter needs to be replaced in advance due to the sorptive saturation, operate according to the instructions.
Why will the airflow be reduced after the air cleaner is used for a period of time?	Make sure the air inlet and outlet are not plugged. Remove all the plastic bags from the filters. Check the condition of the filter and clean the filter if necessary. If the filter is used for a period of time, consider replacing it. Make sure the air inlet grille is at least 30 to 90 centimeters away from the walls.

If you need services or wan to purchase filters and other supplies, please call our customer service line 0800-600-026.

- 使用前請詳細閱讀本操作說明指示,並妥善保管,以供日後參考。
- 當我們在使用電器用品時,應具備最基本的安全常識,以避免火災、觸電以及其他傷害的發生。 因此,請遵守以下指示

0	使用電器用品應註意安全,避免 火災,電擊和傷害的危險。		本空氣清淨機必須直立使用。
0	請勿將電線安置在地毯下或接近 熱源。		請勿讓物體進入或阻擋進出風口, 如此會損傷到空氣淨化器。
0	更換(清潔)濾網指示燈亮起時就 要更換(清潔)耗材,以確保空氣清 淨機的清淨效果。		請勿坐、站或放置物品在空氣 清淨機上面。
	電線,插頭或產品已破壞時請勿 使用。	\bigcirc	在有易燃的氣體或蒸汽處,請勿 使用空氣清淨機。
	除非過濾元件完備否則請勿使用。	\bigcirc	請勿在室外或門窗開啟的情況下 使用。
	請勿將本產品靠近潮濕或容易被水 潑濕的地方使用如浴室,廚房,水槽 邊及嚴重潮濕的地下室。		若電源線損壞時,必須由製造廠 商或其授權服務點及維修人員維 修更換以避免危險。



● 本電器不預期供生理、感知、心智能力、經驗或知識不足之使用者(包括孩童)使用, 除非在對其負有安全責任的人員之監護或指導下安全使用。


注意

兒童應受監護,以確保孩童不嬉玩電器。


【使用前準備工作】

- 將空氣清淨機從包裝盒中取出,置於桌面或平坦地板上。機體四周離牆壁或其他家居至少 60 公分以上,以利空氣循環。
- 請依黃色貼紙標示操作,由機器上方兩側往外打開左右側蓋,先取下前置濾網,再旋轉濾網上方兩顆固定旋鈕,取出Molecular濾網及H13高效濾網,並依照順序裝回,蓋上濾網蓋。
- 註意:使用前請移開所有包裝材料以免堵住進出風口。

8

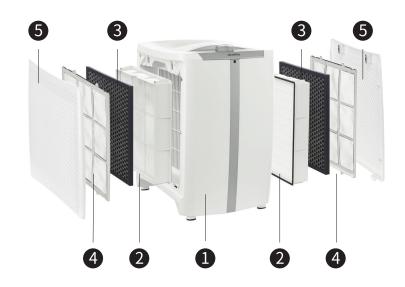

- 1 空氣清淨機本體
- 2 H13高效濾網
- **3** Molecular濾網
- 4 前置濾網
- 5 濾網蓋
- 6 電源線1條





產品	Dustie 達氏 空氣清淨機	集塵模式	平行雙進風物理過濾
型 號	DAC500 Plus	CADR	535m³/h
消耗功率	40W	噪 音	33-60dB
額定電壓	110V∼60Hz	適用面積(最大)	64m²(19坪)
能源效率	0.220cmm/W	C A S R 潔淨空氣提供率	8.85cmm
空氣品質感應	氣態感測器/固態顆粒感測器	智慧模式	自動模式/快速清潔模式
負離子	有	遙控器	有
尺寸	產品:340 (W) x388 (D) x496 (H) mm	重 量	產品淨重:8.2kg
	包裝:377 (W) x420 (D) x545 (H) mm		包裝毛重:11kg

插雷運轉

當每次重新插上電源時,空氣凈化器發出"B"聲,空氣品質指示燈由綠燈橙黃燈紅燈依次亮滅,檔位指示 燈由ATUO至MAX依次亮滅,空氣清淨機進入待機狀態。

開啟電源

按一下(**()**), 電源指示燈(藍燈)亮起, 空氣清淨機將開機並設定於() **ご檔**, 二檔風速指示 燈(藍燈)亮起。

關機

在空氣清淨機啟動運轉中,按一下(())鍵可以關機,淨化器發出"B"一長聲.並處於待機狀態。

空氣品質指示

通電開機後,雙空氣質量感測器預三分鐘后工作(綠燈優/黃燈一般/紅燈差)

風速選擇

要更換模式或檔位,可旋轉風速旋鈕來選擇,藍色指示燈隨檔位選擇對應亮起以指示所選擇當前檔位, 風速則會對應所選檔位柔速變換。

定時設定

空氣清淨機可設定定時關機,分別為2H,4H,8H,12H小時。

按一下() 清淨機發出"B"聲(2H)指示燈亮起,空氣清淨機將運轉時間設定於2小時後關機。要選擇4小時或8小時或12小時可再按()。若定時指示燈全部沒有亮,則為取消定時。

智慧模式

在空氣清淨機啟動運轉中,可以自由切換三種智慧模式:

自動模式 (A) 清淨機內置雙空氣品質感測器依智能偵測到的結果,自動切換至適當風速運行。

清潔模式 25 按下此鍵,機器進入快速清潔模式,以極速-高速-中速每1分鐘間隔循環運轉工作,30分鐘後切換至自動模式工作,自動檔位指示燈同步點亮。


睡眠模式 2.) 在睡眠模式清淨機以靜音檔運行,指示燈亮度減暗,空氣品質指示燈熄滅。


負離子

機器運行狀態下,按()類開啟或關閉負離子。

遙控

遙控器的加入,使您能夠自如的操作空氣清淨機。 為了提供潔淨舒適的空氣,建議先用中高檔運轉1小時後, 再選擇是否切換到靜音檔。



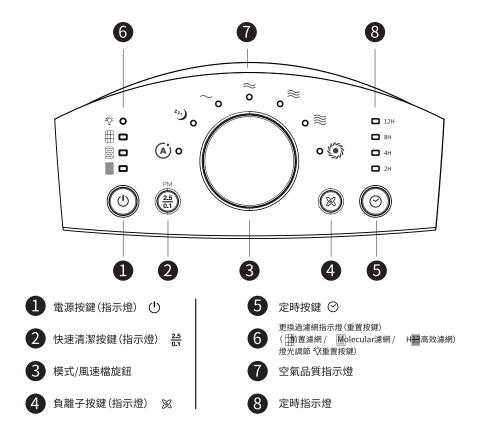

過濾網監測:

前置濾網(開指示燈/重置按鍵

當本空氣淨化器累計使用約1個月,前置濾網()攝潔指示燈(紅色)將會持續閃爍,提醒您清潔。前置濾網()為可水洗,開用吸塵器或水洗(洗完請晾乾後裝入機身)等方式清潔濾網。清潔完成後,請用尖狀物按壓前置濾網指示燈約5秒,指示燈不再閃爍直至熄滅,計時器重新計時。

Molecular濾網(屬指示燈/重置按鍵

當本空氣淨化器累計使用約3個月,Molecular濾網()團換指示燈(紅色)將會持續閃爍,提醒您更換。 更換後請按壓更換指示燈約5秒鐘,指示燈不再閃爍直至熄滅,計時器重新計時。此時已重新設定計時, 等下次時間到再次提醒。貼心提示:依照使用環境不同,建議3-6個月更換。(經常使用者約1個月後,建 議用吸塵器對Molecular濾網進行一次清潔,以達到理想的過濾效果) H13高效濾網(HEPA)指示燈/重置按鍵

當本空氣清淨機累計使用約6個月,H13高效濾網(HEPA)更換指示燈(紅色)將會持續閃爍,提醒您更換。更換後請按壓更換指示燈約5秒鐘,指示燈不再閃爍直至熄滅,計時器重新計時。此時已重新設定計時,等下次時間到再次提醒。貼心提示:依照使用環境,建議6-12個月更換。(經常使用者每1個月後,建議用吸塵器對H13高效濾網進行清潔,以達到理想的過濾效果)

燈光調節:

在開機狀態下,按(『蓮置鍵可設定空氣品質、藍色指示燈的亮度。注意設定值為永久記憶。即斷電再開機仍有按上次記憶亮度。


註:亮度共分為4段亮度:正常亮度-中亮度(初始值)-減半亮度-(空氣品質指示燈)滅+(藍色指示燈)維持減半亮度。

【機體清潔維護】




注意

對電器進行清潔或保養等相關作業前 須將電器切斷電源。



1

濾網蓋拆下後,可以用吸塵 器小毛刷吸頭清潔或用水清 洗,等它完全乾後再裝回。




2

清淨機本體外殼,請以濕抹 布輕輕擦拭外表。絕不可以 讓水從進出風口流入影響馬 達,或開關位置。




絕不可將清淨機浸入水中,不可使用化學性清潔劑 擦拭機器,不可讓水進入機器。

清潔更換濾網



關閉空氣清淨機並拔下插頭



2 打開左右兩側濾網蓋: 濾網蓋由上方兩側位置 往外側拉出




3 取出前置過濾網及 Molecular濾網 (新機濾網需取下塑料袋)




4 轉開固定旋鈕




5 沿兩側滑槽,向外上提 後取出H13高效濾網



6 以吸塵器清潔或更換新過濾網 (前置濾網可水洗需晾乾後使用)



依序放回濾網, 及蓋上濾網蓋。



插回插頭,按(()按鍵開啟清淨機. 然後按住清潔或更換指示燈約5秒鐘,指示燈不再閃爍直至熄滅,計時器重新計時。此時已重新設定計時,等下次時間到再次提醒。



為了更好的使用空氣清淨機,請 勿阻塞氣味感應器孔位以及機身 後飾條上的粉塵傳感器,常清潔並 保持清潔。

常見故障	常見原因
為什麽空氣清淨機沒有出風?	 請檢查電源線插頭是否適當插好。 請檢查清淨機濾網的塑膠袋是否拆除。 請檢查清淨機濾網是否放置妥當。 濾網蓋是否適當蓋好? 是否有物品堵住清淨機上方出風口,如果出風口被堵住,會影響清淨機運作。 是否有設定定時運轉,而設定時間已到。
為什麼要清潔濾網?	● 濾網是清淨機的核心,定期的清潔濾網不僅可以提高 過濾效果,還可以延長濾網的使用壽命。DAC500系列 濾網使用一段時間以後可進行一次外部清潔。請依照 說明書指示清潔濾網後,放回清淨機內,插上插頭,前 置濾網清潔後需按住初過濾器按鍵5秒,以重新設定計 時。
每隔多少時間該更換H13高效濾網?	 根據用戶的使用環境,如果環境空氣品質較差,或是用於新屋裝修後,建議較頻繁的清潔濾網或是提早更換新濾網,請依照說明書指示清潔濾網後,放回清淨機內,插上插頭,按住相應濾網(重置按鍵)5秒,以重新設定計時。
每隔多少時間該更換Molecular濾網?	● 根據用戶的使用環境,如果吸附飽和需要提前更換 Molecular濾網,請依照說明書指示操作。
為什麼清淨機使用一段時間後產生的 氣流會減少?	● 確保空氣入口和過濾後空氣排放口沒有被堵塞。 取下濾網中所有的塑料袋。 檢查濾網的狀況,如有必要,清潔濾網。 濾網如果使用一段時間,請考慮更換新濾網。 確保空氣入口格柵四周離墻壁的距離至少為30至90厘米。

[●] 如需要服務或購買濾網等耗材,請聯絡顧客服務專線 0800-600-026

型號(型式): DAC500 Plus 設備名稱:空氣清淨機 Equipment name Type designation (Type) 限用物質及其化學符號 Restriced substances and its chemical symbols 部件名稱 六價鉻 多溴聯苯 多溴二苯醚 Unit Name 汞Mercury 鎘Cadmium Hexavalent Polybrominated Polybrominated 鉛Lead (Pb) (Cd) chromium biphenyls diphenyl ethers (Hg) (Cr+6) (PBB) (PBDE) \bigcirc \bigcirc 電源線組 馬達電動機 \bigcirc \bigcirc PCB基板組件 \bigcirc \bigcirc \bigcirc \bigcirc 負離子產生器 配線線材 \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc 塑膠部件 \bigcirc 金屬部件

備考1. "超出0.1 wt%"及 "超出0.01 wt%" 係指限用物質之百分比含量超出百分比含量基準值。

Note 1: "Exceeding 0.1 wt%" and "exceeding 0.01 wt%" indicate that the percentage content of the restricted substances exceeds the reference percentage value of presence condition .

備考2. "〇"係指該項限用物質之百分比含量未超出百分比含量基準值。

Note 2: "O" indicate that the percentage content of the restricted substance does not exceed the reference percentage value of presence condition .

備考3. "一"係指該項限用物質為排除項目。

Note 3: The "—" indicate that the restricted substance corresponds to the exemption.